

## LC-TOSA1XXFX3

Transmitter Optical Sub-assembly: 1310nm MQW-FP Laser Diode



### Features

- ◆ Coaxial Package
- ◆ InGaAsP/InP MQW-FP laser Diode
- ◆ Low threshold, high slope efficiency and high output power LD
- ◆ Maximum Soldering Temperature /Time:260□/10s
- ◆ Operating Case temperature: -40□ to +85□
- ◆ RoHS Compliant Products Available

### Applications

- ◆ Optical Transmitter of Data Signal
- ◆ Optical Transmitter of Analog Signal
- ◆ Test Equipments

### General

LC-TOSA1XXFX3 Series are 1310nm InGaAsP/InP MQW-FP laser diode modules designed for fiber optic communication systems. These modules are transmitter optical sub-assembly with low threshold current and high performance at high temperature. Ideally suitable for short reach applications, data rates from 1.25Gbps to 2.5Gbps.

A laser diode is mounted into a Ø5.6mm coaxial package integrated with an InGaAs monitor PD, a single-mode fiber-stub and a split sleeve for the optical connector with Ø1.25mm ferrule.

### Ordering information (Standard version<sup>\*Note1</sup>)

Part No.	Pin Type	LD Type	Power	Data Rate
LC-TOSA11ADS3	LD-Pin-1	FP	S	1.25Gbps
LC-TOSA11BDL3	LD-Pin-2	FP	L	1.25Gbps
LC-TOSA11ADM3	LD-Pin-1	FP	M	1.25Gbps
LC-TOSA12ADS3	LD-Pin-1	FP	S	2.5Gbps
LC-TOSA12BDL3	LD-Pin-2	FP	L	2.5Gbps
LC-TOSA12ADM3	LD-Pin-1	FP	M	2.5Gbps

\*Note1: For more ordering information, please refer the nomenclature and contact EPOTOLINK sales.

## Absolute maximum ratings<sup>\*Note2</sup>

Parameter	Symbol	Ratings	Unit
Storage temperature	Tstg	-40~+100	□
Operating case temperature	Top	-40~+85	□
Forward current (LD)	IFD	150	mA
Reverse voltage (LD)	VrL	2	V
Reverse voltage (PD)	VrP	20	V
Reverse current (PD)	IrP	2	mA
Soldering temperature (<10s)	Stemp	260	□


\*Note2: Exceeding any one of these values may destroy the device immediately.

## Electrical and optical characteristics

(Pf=1.5mW, SMF (9.5/125μm), Tc=+25°C, unless otherwise noted.)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Threshold current	Ith	CW	—	8	15	mA
Power After Coupling	Pf	CW, If=Ith+20mA	0.05	1.5	2.8	mW
Operating voltage	Vf	CW, Tc=-40~+85□	—	1.2	1.6	V
Slope Efficiency	Se	CW, Average(Ith to Ith+20mA)	—	—	0.14	mW/mA
Peak wavelength	λp	CW	1290	1310	1330	nm
		CW, Tc=-40~+85°C	1265	—	1355	
Spectral width	Δλ	CW, -20dB	—	1	3	nm
Rise time	tr	Ib=Ith, 20-80%, Tc=-40~+85°C	—	0.05	0.15	ns
Fall time	tf	Ib=Ith, 80-20%, Tc=-40~+85°C	—	0.05	0.15	ns
Tracking error	ΔPf	Im hold(@Pf=0.16mW(25°C) CW, Tc=-40~+85°C	-1.5	—	1.5	dB
Monitor current	Im	CW, VrP=5V, Tc=-40~+85°C	100	500	900	uA
Monitor dark current	Id	VrP=5V	—	—	10	nA
Monitor capacitance	C	VrP=5V, f=1MHz	—	10	20	pF
Connector repeatability	—	—	-1	—	1	dB


## TOSA Package series<sup>\*Note3</sup>

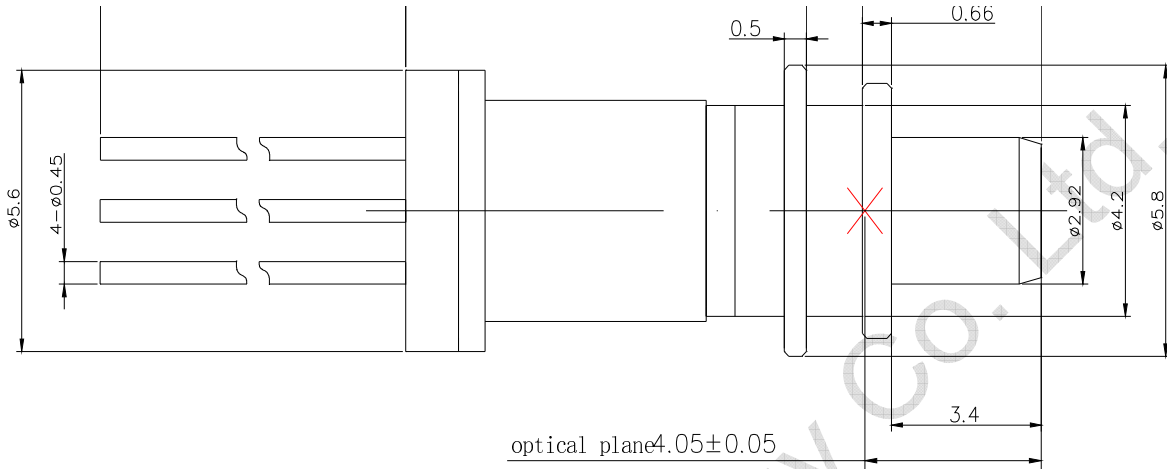


\*Note3: Laser mark can be customized.

## Pin Assignment

TYPE: 1

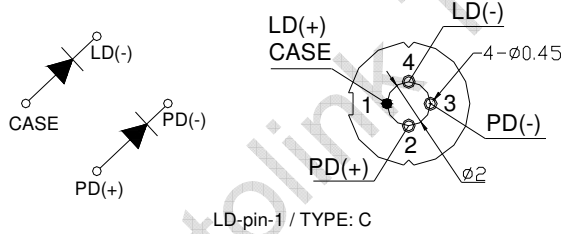

TYPE: 2

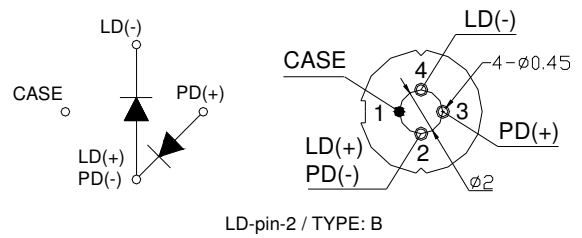

## Ordering Information

LC—TOSA1       
 A B C D E

Order	Parameter	Detailed Description	
A	Data rate	1=1.25Gb/s	2=2.5Gb/s
B	Pin Type	A=LD-pin-1	B= LD-pin-2
C	LD Type	F=FP LD	

<b>D</b>	<b>Power</b>	S= $\leq$ 0.3mW	L=0.3-0.8mW	M=0.8-1.8mW	H=1.8-2.5mW
<b>E</b>	<b>Wavelength</b>	3=1310nm			

## Precaution

- (1) The modules should be handled in the same manner as ordinary semiconductor devices to prevent the electro-static damages. For safe keeping and carrying, the modules should be packaged with ESD proof material. To assemble the modules on PCB, the workbench, the soldering iron and the human body should be grounded.
- (2) Please pay special attention to the atmosphere condition because the dew on the module may cause some electrical damages.
- (3) Under such a strong vibration environment as in automobile, the performance and reliability are not guaranteed.

## Obtaining Document

You can visit our website:

<http://www.eoptolink.com>

Or contact Eoptolink Technology Inc., Ltd. listed at the end of the documentation to get the latest documentation.

## Revision History

Version	Initiated	Reviewed	Approved	Release Date
Va-4	Zore.Zhao	Kelly.Cao		2009-12-26

## Notice:

Eoptolink reserves the right to make changes or discontinue any product or service identified in this publication, without notice, in order to improve design and/or performance. Applications that are described herein for any of the products are for illustrative purposes only. Eoptolink makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

## Contact:

Add: Floor 5, Building 2, No. 21 Gaopeng Avenue, High-Tech District, CHENGDU, SICHUAN 610041 P.R.  
CHINA

Tel: (+86) 028-85122709 ext 816 & 809

Fax: (+86) 028-85121912

Postal: 610041

E-mail:sales@eoptolink.com

<http://www.eoptolink.com>